

Power Inserter with Divider

Oarsman PI-10x Series Multi out Power Inserter, build-in the Super Wide Band Splitter, Use with PA/UA/CA Pre-Amplifier may solve the problem which many television signal intensity is insufficient.

Features:

- SMATV Full Band DC-2500MHz
- High Shielding Zinc Dis-cast Housing
- F Female Connectors
- Can used to be a TV Splitter
- Work with All OM-series Drop Amplifier




PI-101




PI-102




PI-104



PI-106



PI-108

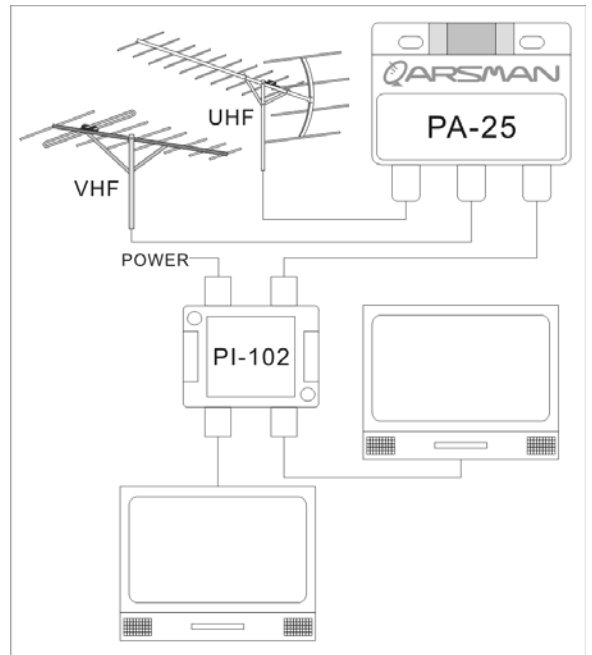

PI-2F



PI-2

ITEM	PI-101	PI-102	PI-104	PI-106	PI-108	PI-22F	PI-22D
Pass Band	DC-2500 MHz					DC-2250	
Output Ports No.	1	2	4	6	8	2	2
Pass Band Loss	1.0dB	4.0dB	8.0dB	11.0dB	13.0dB	1.0dB	1.0dB
DC Connector	F-Female						DC Plug
Return Loss	10dB Min.						
Max. Power Insertion	DC 24V / 1 Amp Max.						
Out-Out Isolation	-	20dB Min.					
Dimensions (WxDxH mm)	55 x 48 x 15	52 x 59 x 23	75 x 59 x 23	119 x 59 x 23	119 x 59 x 23	99 x 76 x 28	99 x 76 x 28
Power Output To LNB	-	-	-	-	-	13V + 18V	13V + 18V

Order Index

PA2x1=PA-2x+PI-101
PA2x2=PA-2x+PI-102
PA2x4=PA-2x+PI-104
PA2x6=PA-2x+PI-106
PA2x8=PA-2x+PI-108

UA251=UA-25+PI-101
UA252=UA-25+PI-102
UA254=UA-25+PI-104
UA256=UA-25+PI-106
UA258=UA-25+PI-108

CA251=CA-25+PI-101
CA252=CA-25+PI-102
CA254=CA-25+PI-104
CA256=CA-25+PI-106
CA258=CA-25+PI-108

