


# YC-212VD 2 x 12 HDTV DISTRIBUTION AMPLIFIER


## Component Video/Composite Video/Digital Audio/ Stereo Audio Signals

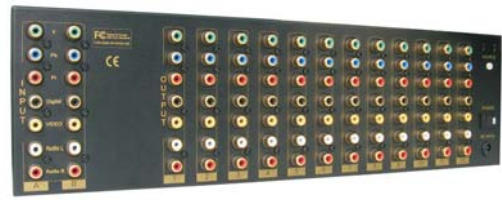

### Features:

- YPbPr : bandwidth 300MHz and support Component Video YPbPr(YCbCr) / RGBHV
- Coaxial: support Digital Audio, SPDIF, PCM, 110MHz
- Composite Video
- Audio : Stereo Audio ( AR-HD/AL-VD)
- Scan rates: 50Hz or 60Hz available and support 480I, 720P, 1080I, 1080P
- Metal rack mountable

Product No.	<b>YC-212VD</b>	
Input/Output	2 IN x 12 OUT HDTV Distribution Amplifier	
Type of Signals	Component Video / Digital Audio / Composite Video / Stereo Audio	
AV Spec.	Video	Audio
Bandwidth	20MHz~300MHz	20Hz~60KHz
Gain	6dB	3dB
Input Port	2 x Component Video / Composite Video	2 x Coaxial (Digital Audio/ PCM) / Stereo (R/L)
Output Port	12 x Component Video / Composite Video	12 x Coaxial (Digital Audio/ PCM) / Stereo (R/L)
Input Level	1Vp-p	2Vp-p
Output Level	1Vp-p (75Ω Load)	3Vp-p (4.7KΩ Load)
In/Out Impedance	75 Ω	10KΩ
Digital Bandwidth (SPDIF)	110MHz	
Power Consumption	25W Maximum	
Enclosure Type	Metal Rack Mountable	
Net Weight(Unit Only)	2Kg Approx.	
Dimension	(LxDxH) 482(436) x 30 x 124 mm	

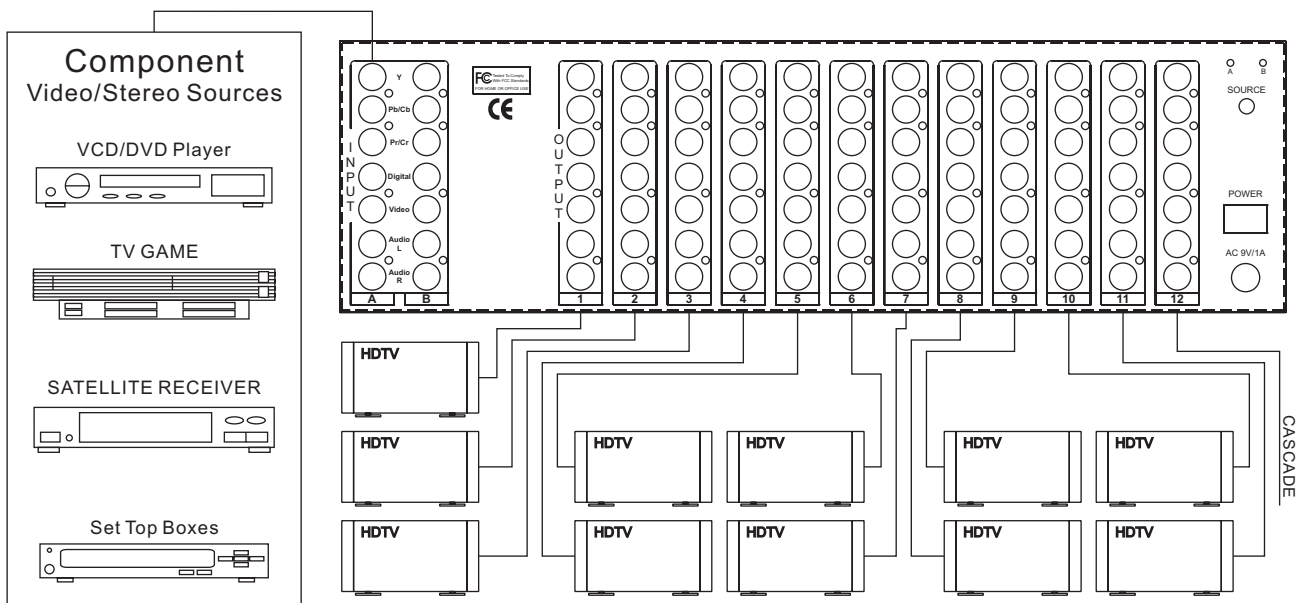

**OARSMAN ELECTRONICS CO., LTD.**  
 NO. ALLEY 10, LANE 239, WU SHENG RD., TAINAN, TAIWAN, R.O.C  
 TEL: 886-6-2584661 FAX: 886-6-2584680  
 web: <http://www.oarsman.com.tw> mail: [market@oarsman.com.tw](mailto:market@oarsman.com.tw)