


# 10-2500MHz ACTIVE DIVIDER

The ADx series are New designed SMATV In-Line Distribution Amplifier, which can Amplified and split Full-Band 10~2500MHz RF signal, from UHF, VHF, HF, FM, to satellite - IF.

## Features

- New model, mini size
- New amplifier circuit designed
- Built-in regulator
- Built-in rectifier diode
- All ports power passing
- Zinc Die-cast hybrid case

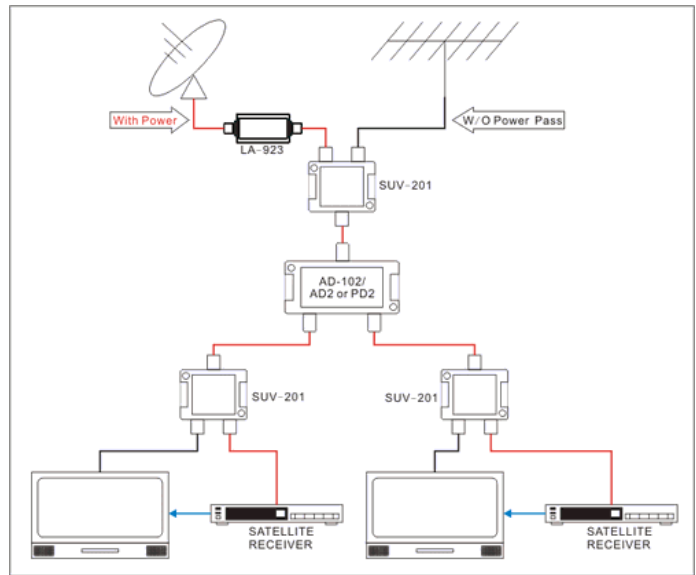

AD-2



AD-4



AD-6



AD-8

Model	Description	Impedance In/Out	Operating Voltage	GAIN	Return Loss	Isolation Out-Out	Dimensions (mm)
<b>AD2</b>	2-WAY AMPLIFIED DIVIDER	75	9~18V	+10dB	6dB	18-25dB	23x75x59
<b>AD4</b>	4-WAY AMPLIFIED DIVIDER	75	9~18V	+6dB	6dB	20-25dB	23x75x59
<b>AD6</b>	6-WAY AMPLIFIED DIVIDER	75	9~18V	+2dB	6dB	20-25dB	23x119x59
<b>AD8</b>	8-WAY AMPLIFIED DIVIDER	75	9~18V	+0dB	6dB	20-25dB	23x119x59